

Datasheet

Instruction

DNAKE S615 provides an integrated security solution. It enables user to open the door by facial recognition with liveness detection, IC & ID card and PIN Code. It also makes an easy video call with indoor monitor and mobile APP, to achieve an convenient and secure life.


Key Features

- Induction loop for hearing impaired
- Braille dot for visually impaired
- 3 output relays for door locks
- Tamper alarm
- Facial Recognition (No distortion)
- Support Face, IC (13.56MHz) & ID (125kHz) card, PIN code
- 2MP camera with WDR mode

Physical

- System: Android
- RAM: 1 GB
- ROM: 8 GB
- Front Panel: Aluminum
- Button: Mechanical
- Power Supply: PoE (802.3af) or DC 12V/2A
- Standby Power: 8 W
- Rated Power: 16 W
- Camera: 2MP, CMOS, WDR
- IR Sensor: Support
- Wiegand Port: Support
- Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive
- Door Entry: Face, IC (13.56MHz) & ID (125kHz) card, PIN code
- Reset Button: 1
- RS485 Port: 1
- Relay Out: 3
- Input: 4
- IP / IK Rating: IP65 / IK08
- Installation: Surface Mounting
- Surface Mounting DIM: 295 x 133 x 42.7 mm
- Working Temperature: -40°C to +55°C
- Storage Temperature: -40°C to +70°C
- Working Humidity: 10% to 90% (non-condensing)

DNAKE S615 (Surface Mounting)

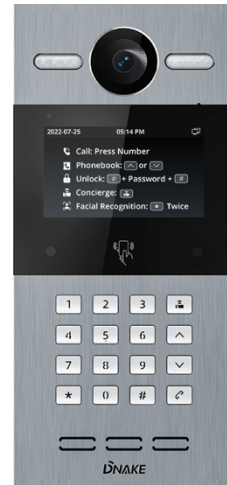

Datasheet

Display

- Display: 4.3-inch TFT LCD
- Resolution: 480 x 272

Audio

- Audio Codec: G.711
- Echo Cancellation
- DTMF: RFC2833
- Microphone: Built-in microphone
- Speaker: 8Ω / 1W

Video

- Video Codec: H.264
- Video Resolution: up to 1920 x 1080
- Viewing Angle: 120° (H) / 75° (V) / 131° (D)
- Max. Image Transfer Rate: 1080p – 25fps
- Light Compensation: LED white light

Networking

- Protocol: SIP, UDP, TCP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPV4, ARP, ICMP

Package Features

- Package Content:
 - DNAKE S615
(Power adapter not included)
 - Surface Mounting Box
 - Screwing Kit
 - Quick Start Guide
- Qty/CTN: 10 pcs
- N.W/PCS: 1.55 kg
- G.W/CTN: 20 kg
- Giftbox Size: 360 x 170 x 100 mm
- Carton Size: 490 x 420 x 450 mm

